


OP-Film S272

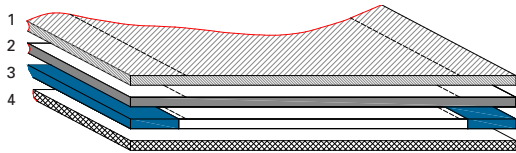

1. PE
2. Carrier
3. Adhesive
4. Liner

Properties:

Construction:

PE layer: **with PE**
 Carrier: polyurethane 25 micron, transparent
 Adhesive: 45 g/m²
 Liner: 90 g/m²
 Finger lift: **2x 2cm blue finger lift with perforation**

Adhesive:

Peel: min. 10N/25mm
 MVTR: > 1.000 g/m²/24h, before sterilization

Test Method
FTM1/20min.

Adhesive strength	Adhesion to skin	MVTR
OP-Film S272	●	●●●

●●● high ●● medium ● low

Quality Assurance

The OP-Tapes are manufactured by Eurotape in accordance with the EN ISO 9001 and EN ISO 13485 standards. This ensures that we deliver products and services that consistently meet customer requirements, guaranteeing full customer satisfaction. All our products have a CE label and comply with the requirements of the Medical Device Directive 93/42/EEC.